



## Screw connectors


<b>General information</b>	<b>2</b>
<b>Screw connectors and terminals</b>	<b>3</b>
<b>Through connectors 10 - 630 mm<sup>2</sup></b>	<b>4</b>
<b>Screw terminals 10 - 630 mm<sup>2</sup></b>	<b>4</b>
<b>ISL2201, holding tool</b>	<b>4</b>



# Screw connectors for low and medium voltage

Elpress screw terminals and connectors are used at low and medium voltages and for

- stranded and solid Al and Cu conductors
- round cross sections 10 mm<sup>2</sup> up to 630 mm<sup>2</sup>
- sector cross sections 16 mm<sup>2</sup> up to 240 mm<sup>2</sup>
- up to 36 kV
- supplied in sealed plastic bag with detailed instructions for use



Screw terminal.



Screw through connector.

Connection to the conductors is achieved by tightening the screws in the through connector or terminal to a pre-determined torque. Through connectors and terminals are made of aluminium. The terminal palm is made of copper and the accompanying screws Elpress uses are made of brass to reduce friction and facilitate installation.

Tools for assembly can be a spanner/wrench or a battery-operated impact wrench which has a high torque force, > 100 Nm. To facilitate installation there is holding tool, ISL2201, to hold the screw connector in its right position during tightening of the screws. The screw connectors have a partition wall to enable jointing of oil-filled conductors to plastic-insulated XLPE conductors. The screw connectors meet the requirements of IEC 61238-1.

### Handles multiple cross section areas

The installation of a screw connector can be done easily without heavy special tools and can withstand several area stages in the same connector, for instance 10-50 mm<sup>2</sup>. The user gets a reduced range of products and a flexible solution.

### Washer solution

To reduce the number of variants of the terminals, washers are delivered with the terminals. A washer is always required for connection of the terminal palm to a bus bar with a screw.



Bolts are tightened using a wrench. It is also possible to use a battery operated wrench.

### SC50R50S

On connector SC50R50S the screws are pre-mounted in the connector and covers all areas from 10-50 mm<sup>2</sup>. SC50R50S is also suitable as screen connector for 10-35 mm<sup>2</sup> Cu/Al.



On connector SC50R50S the screws are pre-mounted in the connector.

### Marking

Elpress marking of screw connections shows logo, product name, conductor area (for stranded and solid conductors) and assembly order of the screws.

The terminal palm is marked with bolt size (M-thread) for bolt connections.

Cat. no. SL70R70S-10-12

SL = Screw terminal

70R = max 70 mm<sup>2</sup> round conductors

70S = max 70 mm<sup>2</sup> sector conductors

10-12 = screw size 10 and 12 (M-thread)

Cat. no. SC150R95S

SC = screw through connector


150R = max 150 mm<sup>2</sup> round conductor

95S = max 95 mm<sup>2</sup> sector conductor

### Screws connection to bus bars

The following apply to bright galvanized nuts and screws in strength class 8.8 used for connecting terminals to Cu and Al bus bars:

- Always use a torque wrench to ensure that they are tightened to the right torque. Ensure it is regularly calibrated in accordance with the supplier's instructions.
- Use the recommended torque in accordance with the screw manufacturer's instructions.
- Always use a hard flat washer to reduce friction between the installation surface and hole edge pressure, min hardness HB200.
- A spring washer in accordance with DIN 6796 may be used together with a flat washer to further increase strength in advanced applications.
- Assemble as shown in image.

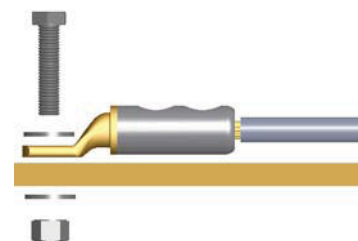


Screw	Tightening torque (Nm)
M5	5
M6	9
M8	21
M10	41
M12	70
M14	110
M16	170
M20	340



### Screw connectors and terminals

By means the enclosed special washers for Elpress screw terminals, two bolt dimensions may be used in one palm hole size, see picture and table below. The required stocking of different terminals for different bolts is hereby heavily reduced.

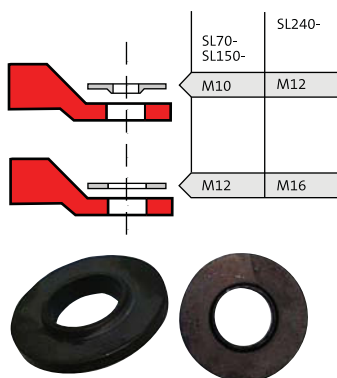

Special washers for Elpress screw terminals.

Stranded and solid conductors area, mm <sup>2</sup>	Type	Connector Cat.no.	Terminal M12, M10	Terminal M16, M12
10	round	SC50R50S	SL70R70S-10-12	
16	round sector	SC50R50S SC50R50S	SL70R70S-10-12	
25	round sector	SC50R50S SC50R50S	SL70R70S-10-12 SL70R70S-10-12	
35	round sector	SC50R50S SC50R50S	SL70R70S-10-12 SL70R70S-10-12	
50	round round sector sector	SC50R50S SC95R95S SC50R50S SC95R95S	SL70R70S-10-12 SL70R70S-10-12	
70	round sector sector	SC95R95S SC95R95S SC150	SL70R70S-10-12 SL70R70S-10-12	
95	round round sector sector sector sector	SC150R95S SC95R95S SC150R95S SC95R95S SC150	SL150R95S-10-12 SL150R95S-10-12	
120	round sector sector sector	SC150R95S SC240R185S SC150 SC240	SL150R95S-10-12	SL240R185S-12-16
150	round sector sector sector	SC150R95S SC240R185S SC150 SC240	SL150R95S-10-12	SL240R185S-12-16
185	round sector sector	SC240R185S SC240R185S SC240		SL240R185S-12-16 SL240R185S-12-16
240	round sector sector	SC240R185S SC400R240S SC240		SL240R185S-12-16 SL240R240S*
300	round	SC400R240S <sup>1)</sup>		SL400R240S <sup>1)</sup>
400	round	SC400R240S <sup>1)</sup>		SL400R240S <sup>1)</sup>
500	round	SC630R		SL630R*
630	round	SC630R		SL630R*


\* Palm hole as requested

1) for un-compressed cable. For compressed cable, contact Elpress.



## Through connectors 10 - 630 mm<sup>2</sup>

- Screw material: brass, for lowest friction
- Partition to prevent fluid passing through
- Voltage up to 36 kV
- Meets the requirements of IEC-EN 61238-1:2003




Area	Cat. no.	mm L	øD	ød
10-50	SC50R50S	62	20/17,3*	10,7
50-95	SC95R95S	114	27	16
70-150	SC150	134	33,5	20
95-150	SC150R95S	114	27	16
120-240	SC240	144	38/33*	25
120-240	SC240R185S	134	33,5	20
240-400	SC400R240S	175	41,5	25,7
500-630	SC630R	210	49	33

Suitable for conductors as in table on previous page. \* measurement between plane sides

## Screw terminals 10 - 630 mm<sup>2</sup>

- Screw material: brass, for lowest friction
- voltages up to 36 kV
- meets the requirements of IEC-EN 61238-1:2003
- the terminals are of bimetallic type to provide best possible connections to bus bars, apparatus terminals, etc.

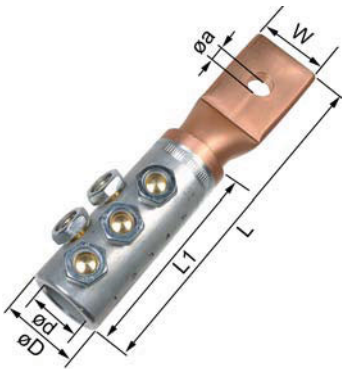

Area	Cat. no.	mm L	W	L1	øD	ød	a
10-70	SL70R70S-10-12	103	25,5	59	21,5	11	11-13
95-150	SL150R95S-10-12	118,5	30,5	70,5	27	16	11-13
120-240	SL240R185S-12-16	133	30	78,5	33,5	20	13-17
240-400	SL400R240S-16	177	37	103	41,5	25,7	17
240-400	SL400R240S-20	177	37	103	41,5	25,7	21
240-400	SL400R240S-00	183,5	37	103	41,5	25,7	*
500-630	SL630R-1	243	55	129	49	33	*

Suitable for conductors as in table on previous page.

\*Palm hole as requested

## ISL2201, holding tool

To support the terminal or connector while fastening the shear off screws, the ISL2201 has been developed. The tool is produced from high strength material and is easily adjusted for barrel sizes up to 400 mm<sup>2</sup>.

- weight 365 g



Holding tool ISL2201.