




SUPER LOCK HOOK PAT.

SLH1N ~ 3N

Optimal for lifting of road plate and using as a safety hook


FEATURES

- Optimal for laying and removing road plate, and for lifting wires ropes and sling belts.
- The wide mouth of the hook is very effective when attaching and detaching the hook from the road plate.
- When lifted, the lock will automatically close and prevent the hook from coming loose.
- The main body and the shackle are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- The main body is a baked-on finish.

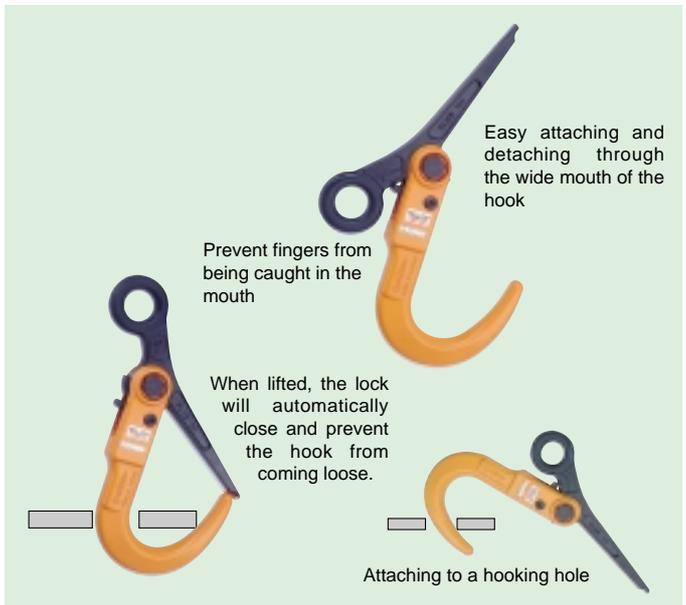


Laying and removing of steel decks

As a safety hook for vertical lifting


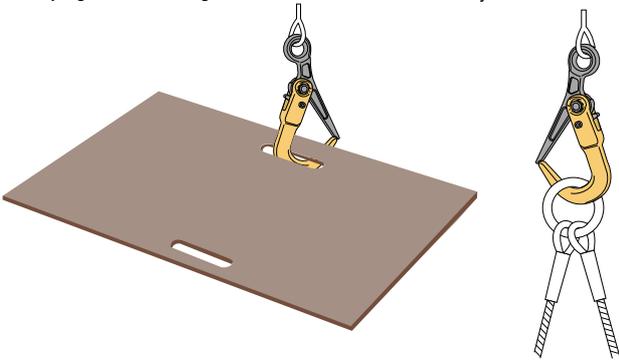


The thickness of the road plate and the dimensions of the hole must be within the specifications shown in the drawing on the right.

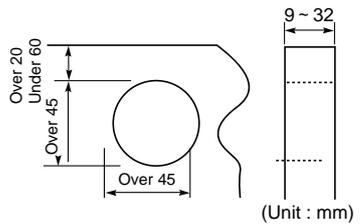

(Unit : mm)

OPERATION INSTRUCTIONS WHEN LIFTING STEEL DECKS

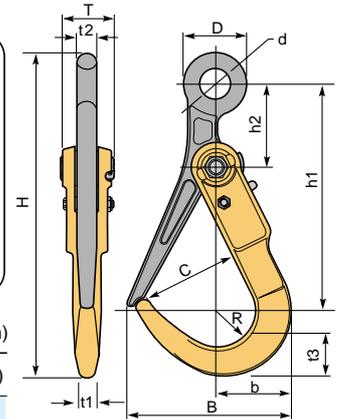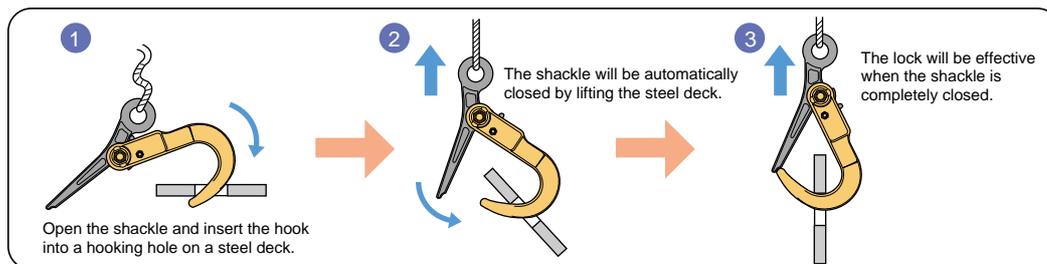

(Unit:mm)

SPECIFICATIONS·DIMENSIONS TABLE

Item No.	Rated capacity (ton)	C	B	b	D	d	H	h1	h2	R	T	t1	t2	t3	Weight (kg)
SLH 1N	1	80	140	65	56	24	298	210	80	32	48	28	16	28	2.5
SLH 2N	2	96	166	75	64	32	339	236	89	38	54	29	18	30	3.2
SLH 3N	3	96	169	78	64	32	339	236	89	38	54	31	18	33	3.4

LIFTING CLAMPS FOR STEEL