



강재 수평 클램프

HLC-S

형강클램프



■ 수평클램프(일반)


부품명칭	부품 NO.
캠 (CAM)	2 캠
패드 (PAD)	3 패드 5-1 육각볼트 5-2 나이론너트
스프링 (SPRING)	6 스프링핀 7 스프링
볼트 (BOLT)	4-1 캠지지볼트 4-2 캠지지너트 4-3 스프링핀

모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HLC 0.5S	0.5	1~13	1.3
HLC 1S	1	1~13	1.5
HLC 2S	2	3~22	3.7
HLC 3S	3	12~35	8.1
HLC 1	1	1~13	1.6
HLC 1W	1	2~20	2.5
HLC 2	2	3~22	3.9


- 형강(H형, I형, T형, L형강등)
- 구조물 전용 수평클램프
- 컴팩트한 스프링 잠금식

HLC-H


핸들식 장금장치 타입



◀ HLC-H

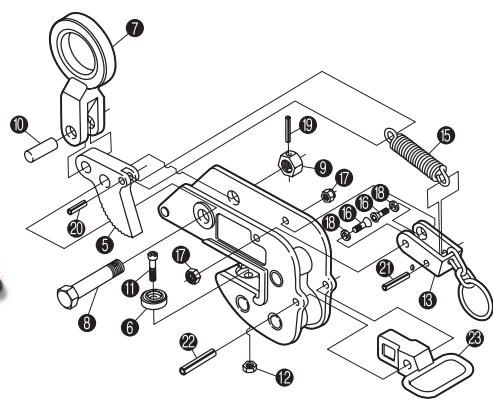

부품명칭	부품 NO.
샤클 (SHACKLE)	7 샤클 10 샤클용핀
캠 (CAM)	5 캠 20 스프링핀 8 캠 지지볼트 9 캠 지지너트 19 스프링핀
패드 (PAD)	6 패드 11 육각볼트 12 나이론너트
핸들 (HANDLE)	13 U핸들 21 스프링핀 16 육각구멍볼트 17 U너트 18 플라
스프링 (SPRING)	15 스프링
그립 (GRIP)	23 그립 22 스프링핀

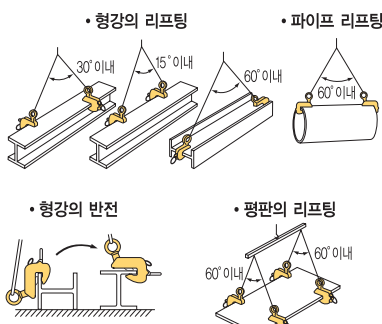



모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HLC 0.5H	0.5	0~25	3.0
HLC 1H	1	0~30	5.5
HLC 2H	2	0~35	9.5
HLC 3H	3	0~40	13.5
HLC 5H	5	0~45	23.0

- 형강(H형, I형, T형, L형강등)
- 구조물 전용 수평클램프
- 잠금장치 적용으로 더욱 안전함

강재 수평 클램프

HLC-HE

경량형·핸들식 잠금장치 타입

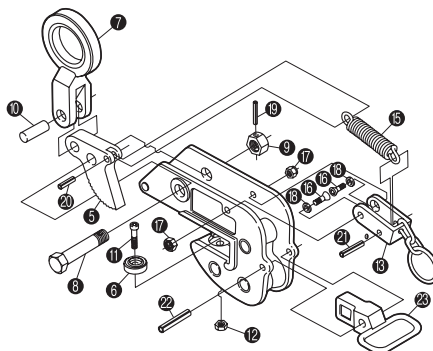


부품명칭	부품 NO.	
샤클 (SHACKLE)	7	샤클
	10	샤클용핀
캠 (CAM)	5	캠
	20	스프링핀
	8	캠 지지볼트
	9	캠 지지너트
패드 (PAD)	19	스프링핀
	6	패드
	11	육각볼트
핸들 (HANDLE)	12	나일론너트
	13	U핸들
	21	스프링핀
	16	육각구멍볼트
	17	U너트
스프링 (SPRING)	18	클라
	15	스프링
그립 (GRIP)	23	그립
	22	스프링핀

모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HLC 1HE	1	0~25	3.0
HLC 2HE	2	0~30	5.5
HLC 2WHE	2	0~40	5.9
HLC 3HE	3	0~35	9.5
HLC 4HE	4	0~40	13.5
HLC 4WHE	4	25~60	19.0
HLC 6HE	6	0~45	23.0
HLC 6WHE	6	25~65	29.0
HLC 8HE	8	10~70	50.0
HLC 8WHE	8	30~90	52.0
HLC 12HE	12	20~80	70.0
HLC 12WHE	12	40~100	72.0


- 형강(H형, I형, T형, L형강등)
- 구조물 전용 수평클램프
- 경량형 본체 디자인

HLC-U


스플리트조 타입




• 형강의 리프팅

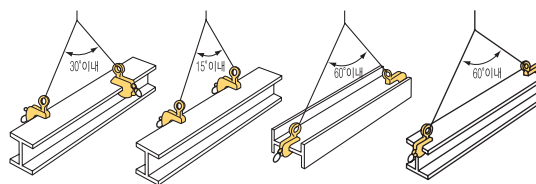


• 평판의 리프팅



• 파이프 리프팅



• 형강의 반전





모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HLC 0.5U	0.5	0~25	3.2
HLC 1U	1	0~30	5.1
HLC 2U	2	0~35	8.7
HLC 3U	3	0~40	13.5
HLC 5U	5	0~45	21.5

강재 수평 클램프


HPC-N

수평리프팅 클램프(후판용)

올바른 사용법

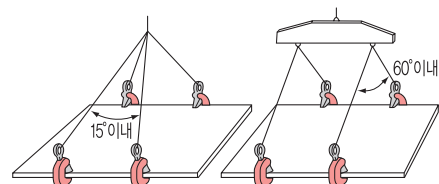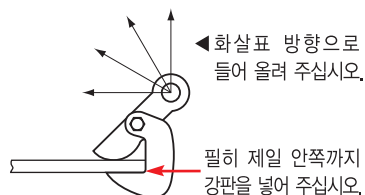

• 장척물의 들어올림에는 4개 이상의 클램프로 작업하시고
될 수 있으면 밸런스를 사용하여 작업 하십시오.
(각도를 염수하십시오.)

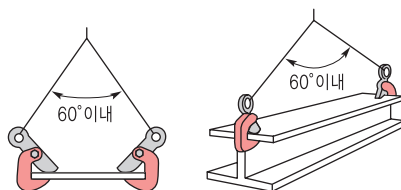

• 강판을 2개로 들어 운반할 때에는
필히 중심의 위치에서 작업 하십시오.

⚠ 위험한 사용법





모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HPC 0.5N	0.5	0~35	1.0
HPC 1N	1	0~40	2.0
HPC 2N	2	0~50	4.5
HPC 3N	3	0~60	7.6
HPC 5N	5	0~80	17.0

GVC-E

자재형수평리프팅클램프

• 들어올리는 각도 염수

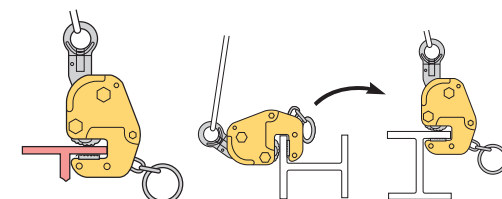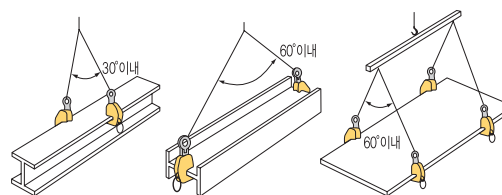



모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
GVC 0.35E	0.35	0~16	1.7
GVC 0.5E	0.5	0~20	2.6
GVC 1E	1	0~25	4.5
GVC 2E	2	5~35	9.0

- 형강(H형, I형, T형, L형강등)
- 구조물 전용 수평클램프
- 유니버설 샤클 적용으로 작업성 증대

강재 수평 클램프

HKC

H형강클램프


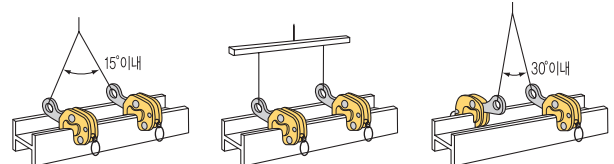
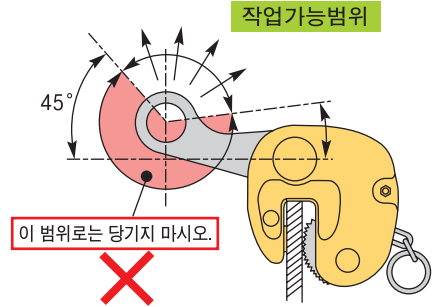


모 델	용 량 (ton)	클램프범위 (mm)	무 게 (kg)
HKC 0.5	0.5	0~20	3.4
HKC 1	1	0~25	6.2

• 각종 구조형강의 수평리프팅 전용

강재 수평클램프의 올바른 사용법

• 들어 올리는 각도를 염수하십시오.

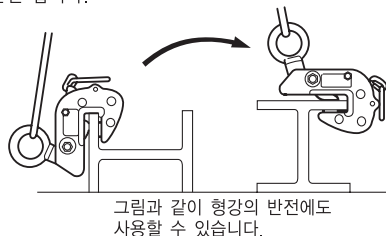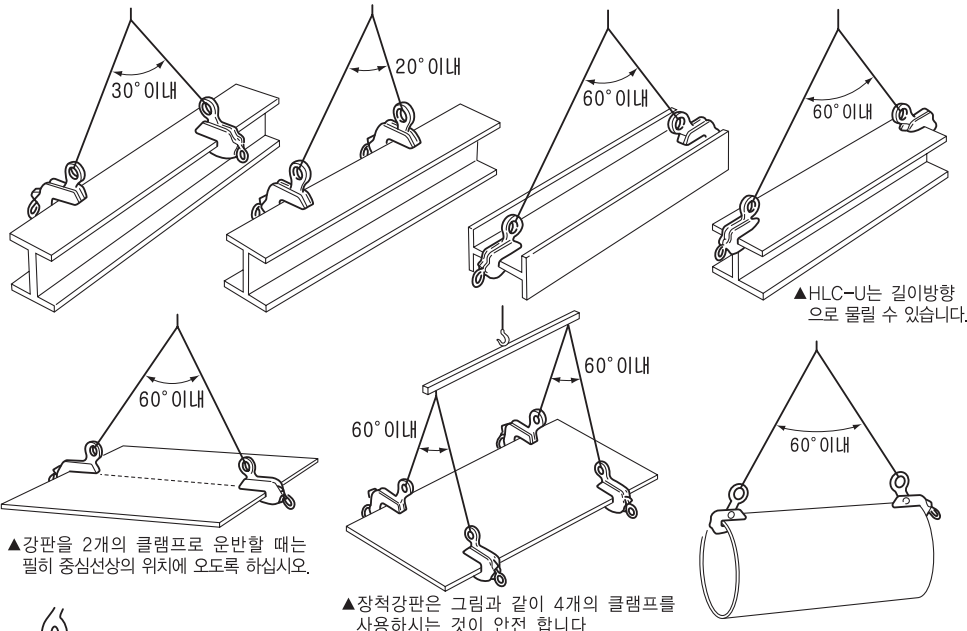

■ HLC-S / HLC

• 들어 올리는 방향을 염수하십시오.

