

후크(HOOK)

SLH-N



슈퍼록 후크




레버를 누르면 샤클이 열림



• 부설철판의 상하작업과 안전후크에 최적

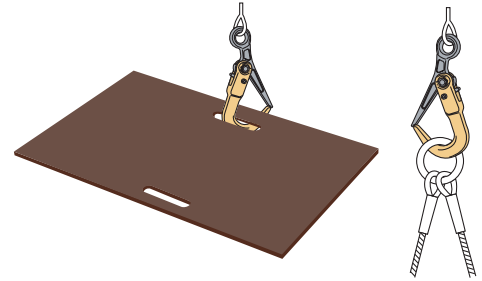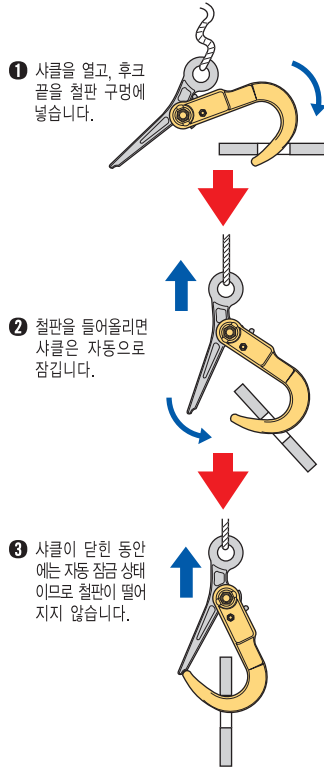

■ 작업이 가능한 구멍크기 및 철판두께

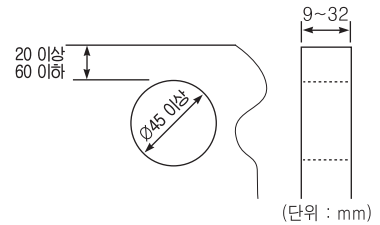


모 델	용 량 (ton)	무 게 (kg)
SLH 1N	1	2.5
SLH 2N	2	3.2
SLH 3N	3	3.4

SLH-S


수퍼록 스윙블 후크



레버를 누르면 샤클이 열림



■ 작업이 가능한 구멍크기 및 철판두께

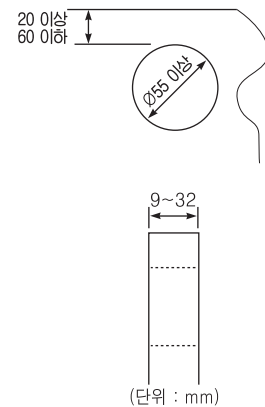


모 델	용 량 (ton)	무 게 (kg)
SLH 2S	2	4.0
SLH 3S	3	4.2




후크(HOOK)

HHC

리프팅 후크

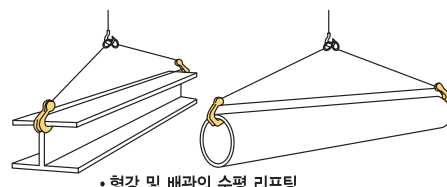

• 형강 및 배관의 수평 리프팅

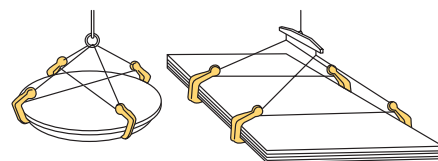



• 강판 등 면적이 넓은 자재의 수평 리프팅

• 여러종류의 강재 리프팅 운반작업에 사용

모 델	용 량 (ton)	클램프범위 (mm)	S.P (안전포인트)	무 게 (kg)
HHC 0.5	0.5	58	111	1.1
HHC 1	1	65	126	2.1
HHC 2	2	80	154	4.5
HHC 3	3	95	187	7.8
HHC 5	5	125	243	16.5

FKH

복공판 리프팅 전용 후크

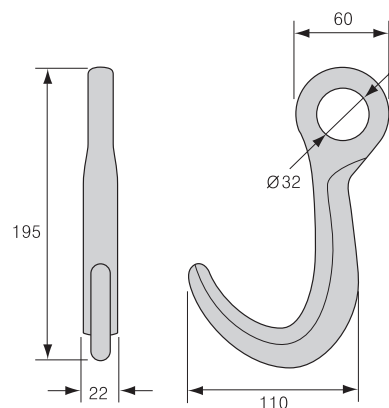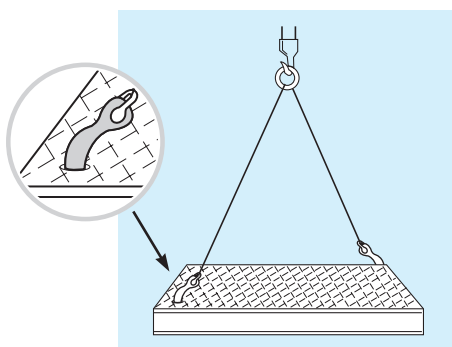

• 복공판 리프팅 전용 후크
• 별도의 잠금장치 없으므로 간편한 탈·부착

모 델	용 량 (ton)	무 게 (kg)
FKH 1	1	0.95


후크(HOOK)

PHC

파이프 후크



※작업 대상물(파이프)에 맞는 치수를 확인 바랍니다.
(S, ℓ, D, T)

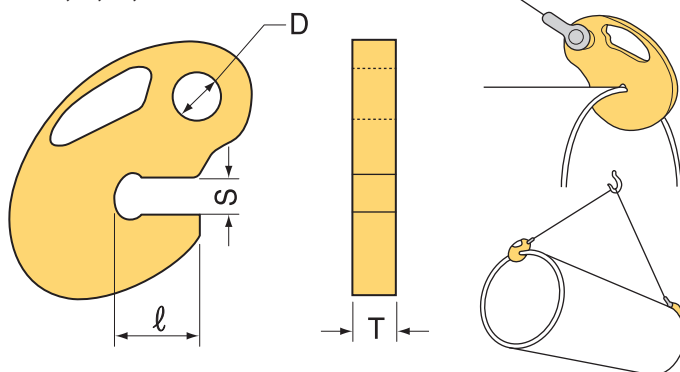


모 델	용 량 (ton)	무 게 (kg)	T	ℓ	S	D
PHC 0.5	0.5	0.5	12	32	16	18
PHC 1	1	1.0	16	42	19	23
PHC 2	2	2.1	19	57	24	30

SDH

슈퍼 풋 후크




작동방법

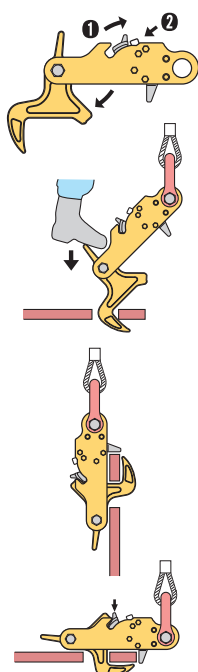

- 1 방아쇠를 위로 당기면 후크가 개방됨(잠금해제)
- 2 스톱퍼를 누르면 방아쇠가 원위치로 고정됨
- 3 후크를 철판 구멍에 밀어 넣고 본체를 철판에 밀착하면 자동으로 잠김
- 4 잠금 상태를 확인 후 철판을 들어올림
- 5 작업이 완료후 방아쇠를 다시 당기면 잠금해제 됨.

■ 작업이 가능한 구멍크기 및 철판두께

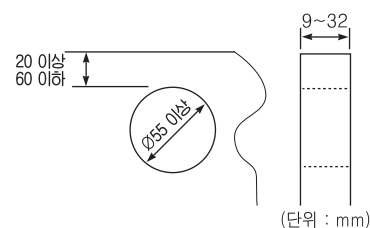

(단위 : mm)



(동영상)

모 델	용 량 (ton)	무 게 (kg)
SDH 3	3	3.8